

PL357



APPLICATION

This is an excellent product that has become one of the most popular versatile surfaces available. This product can be installed indoors or outdoors on concrete or a compacted aggregate base.



ArmorLoc™ 3L



PROPERTY	DESCRIPTION
Primary/Stalk Yarn Type:	Polypropylene
Secondary/Thatch Yarn Type:	N/A
Yarn Cross Section:	Texturized Polypropylene
Standard Color(s)*:	Pine
UV Stabilized:	Yes
Fabric Construction:	Tufted
Primary Backing:	ArmorLoc™ 3L Stabilized Woven PP/PET Multilayer
Coating Type(s):	SilverBack™ Polyurethane, 3mm Polyurethane Foam, 5mm Polyurethane Foam
Perforations:	Not Recommended
Yarn Denier/Ends:	4600/8
Pile Height:	1/4"
Face Weight:	21 oz/yd ²
Fabric Width:	15 ft.

*Custom colors available upon request

200 Howell Dr. Dalton GA 30721

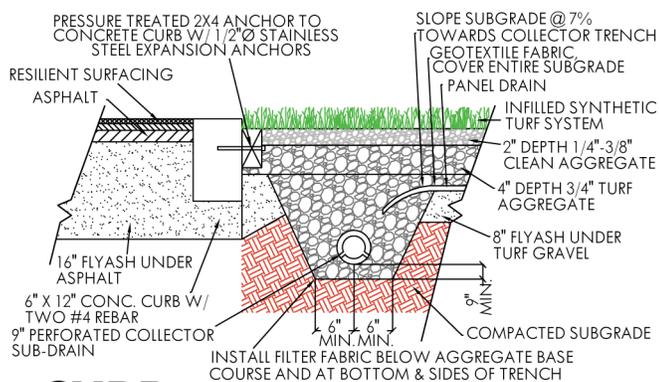
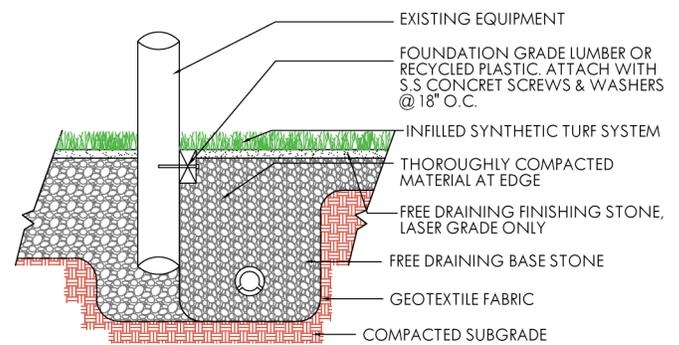
www.cpturf.com

800.564.4492

 CONTROLLED
PRODUCTS

PL357

FINISHED FABRIC	ENGLISH SYSTEM		METRIC SYSTEM		ASTM TEST F-1551
Nominal Specification	Value	Units	Value	Units	Method
Pile Height (Nominal)	.25	In.	6.35	mm.	D-5823
Face Weight	21	oz/yd ²	712	g/m ²	D-5848
Total Fabric Weight (Silverback)	48	oz/yd ²	1,627	g/m ²	D-5848
Total Fabric Weight (5mm Foam)	106	oz/yd ²	3,593	g/m ²	D-5848
Primary Backing Weight	7.4	oz/yd ²	251	g/m ²	D-5848
Secondary Coating Weight	75	oz/yd ²	2,543	g/m ²	D-5848
Tuft Bind	>8	lbs.	>3.6	Kg.	D-1335
Grab Tear Strength (Average)	>200	lbs.	>91	Kg.	D-5034
Lead Content	<50	ppm	<50	ppm	F-2765
Total Yarn Linear Density	4,600	Denier	5,112	D-Tex	D-1577
Tensile Strength	8.0	lbs.	3.63	Kg.	D-5034
Stitch Rate	18	Per 3"	45.72	Per 10 cm	D-5793
Machine Gauge	0.1875	In.	0.48	Cm.	D-5793
Flammability	TEST	PASSED	TEST	PASSED	D-2859
Fiber Thickness	-	-	100	microns	D-3218


CURB

EQUIPMENT

It is the policy of Controlled Products to continuously improve their line of products. Therefore, Controlled Products reserves the right to change, modify or discontinue systems, specifications and accessories of all products at any time without notice or obligation to purchaser.