


PL936



APPLICATION

PL936 is your polyethylene putting green of choice. It has a thicker, denser design with a 3/8 inch pile height and color of Verde/Olive. This design allows for a smoother ball roll and better control.

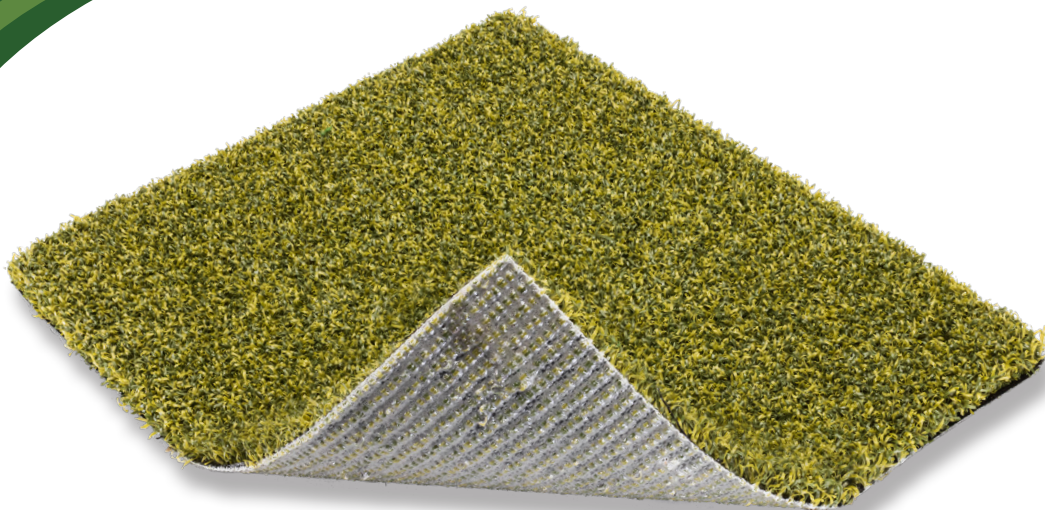

 **ArmorLoc™ 3L**



PROPERTY	DESCRIPTION
Primary/Stalk Yarn Type:	Polyethylene
Secondary/Thatch Yarn Type:	N/A
Yarn Cross Section:	Texturized Polyethylene
Standard Color(s)*:	Verde/Olive
UV Stabilized:	Yes
Fabric Construction:	Tufted
Primary Backing:	ArmorLoc™ 3L Stabilized Woven PP/PET Multilayer
Coating Type(s):	SilverBack™ Polyurethane
Perforations:	Not Recommended
Yarn Denier/Ends:	6000/8
Pile Height:	3/8"
Face Weight:	48 oz/yd ²
Fabric Width:	15 ft.

*Custom colors available upon request

200 Howell Dr. Dalton GA 30721


www.cpturf.com

800.564.4492


 **CONTROLLED**
PRODUCTS

PL936

FINISHED FABRIC	ENGLISH SYSTEM		METRIC SYSTEM		ASTM TEST F-1551
Nominal Specification	Value	Units	Value	Units	Method
Pile Height (Nominal)	0.375	In.	9.525	mm.	D-5823
Face Weight	48	oz/yd ²	1,627	g/m ²	D-5828
Total Fabric Weight	75	oz/yd ²	2,543	g/m ²	D-5828
Primary Backing Weight	7	oz/yd ²	237	g/m ²	D-5828
Secondary Coating Weight	20	oz/yd ²	678	g/m ²	D-5828
Tuft Bind	>8	lbs.	>3.6	Kg.	D-1335
Grab Tear Strength (Average)	>200	lbs	>91	Kg.	D-2256
Lead Content	<50	ppm	<50	ppm	D-2766
Total Yarn Linear Density	6,000	Denier	6,666	D-Tex	D-1577
Tensile Strength	8	lbs.	3.63	Kg.	D-5034
Stitch Rate	27	Per 3"	35.37	Per 10 cm	D-5793
Machine Gauge	0.1875"	In.	.48	Cm.	D-5793
Flammability	TEST	PASSED	TEST	PASSED	D-2859
Fiber Thickness	—	-	100	microns	D-3218

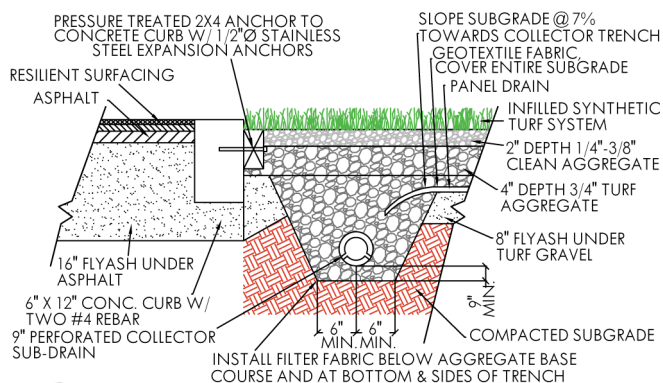

CURB

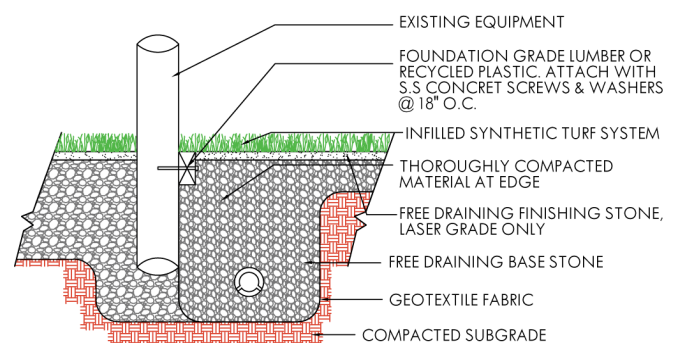

EQUIPMENT

It is the policy of Controlled Products to continuously improve their line of products. Therefore, Controlled Products reserves the right to change, modify or discontinue systems, specifications and accessories of all products at any time without notice or obligation to purchaser.