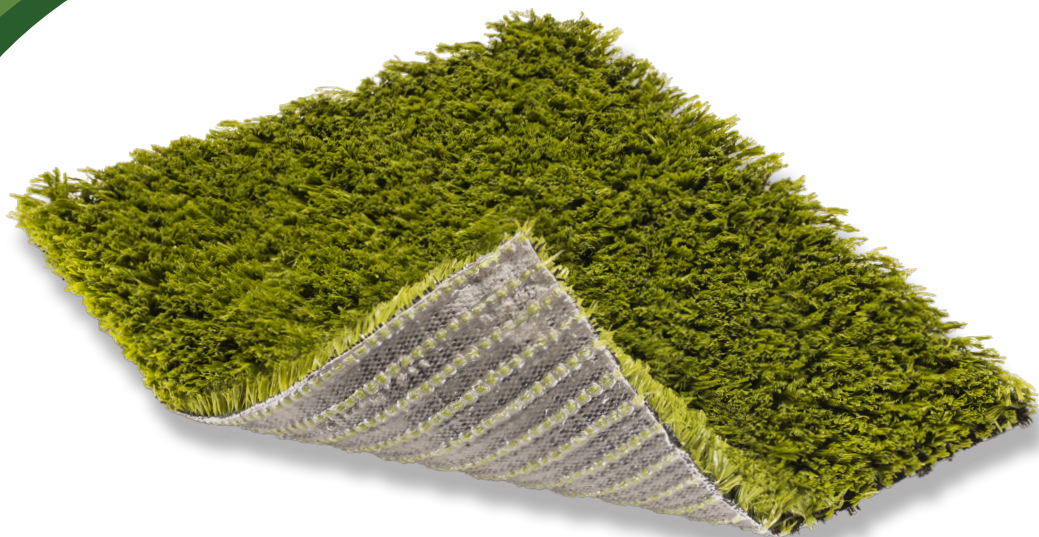


PL952



APPLICATION

This is an excellent putting green product designed to hold shots from 70-100 yards. This product can be installed indoors or outdoors on concrete or a compacted aggregate base.



PROPERTY	DESCRIPTION
Primary/Stalk Yarn Type:	Polypropylene
Secondary/Thatch Yarn Type:	N/A
Yarn Cross Section:	Polypropylene Slit Film
Standard Color(s)*:	Golf Green
UV Stabilized:	Yes
Fabric Construction:	Tufted
Primary Backing:	ArmorLoc™ 3L Stabilized Woven PP/PET Multilayer
Coating Type(s):	SilverBack™ Polyurethane
Perforations:	Not Recommended
Yarn Denier/Ends:	6000/1
Pile Height:	1"
Face Weight:	36 oz/yd ²
Fabric Width:	15 ft.

*Custom colors available upon request

200 Howell Dr. Dalton GA 30721

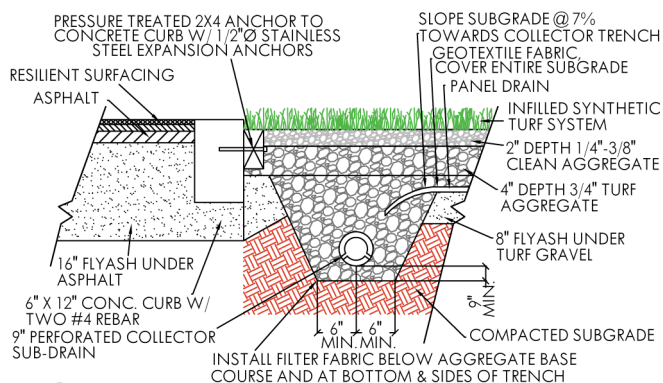
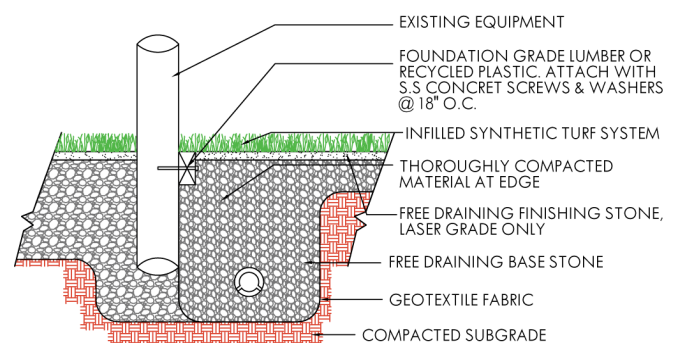
www.cpturf.com

800.564.4492

 **CONTROLLED**
PRODUCTS

PL952

FINISHED FABRIC	ENGLISH SYSTEM		METRIC SYSTEM		ASTM TEST F-1551
Nominal Specification	Value	Units	Value	Units	Method
Pile Height (Nominal)	1	In.	25.4	mm.	D-5823
Face Weight	36	oz/yd ²	1,221	g/m ²	D-5828
Total Fabric Weight	63	oz/yd ²	2,136	g/m ²	D-5828
Primary Backing Weight	7	oz/yd ²	237	g/m ²	D-5828
Secondary Coating Weight	20	oz/yd ²	678	g/m ²	D-5828
Tuft Bind	>8	lbs.	>3.6	Kg.	D-1335
Grab Tear Strength (Average)	>200	lbs.	>91	Kg.	D-2256
Lead Content	<50	ppm	<50	ppm	D-2766
Total Yarn Linear Density	6,600	Denier	7,332	D-Tex	D-1577
Tensile Strength	10	lbs.	4.5	Kg.	D-5034
Stitch Rate	19	Per 3"	24.89	Per 10 cm	D-5793
Machine Gauge	3/8"	In.	.96	Cm.	D-5793
Flammability	TEST	PASSED	TEST	PASSED	D-2859
Fiber Thickness	-	-	100	microns	D-3218


CURB

EQUIPMENT

It is the policy of Controlled Products to continuously improve their line of products. Therefore, Controlled Products reserves the right to change, modify or discontinue systems, specifications and accessories of all products at any time without notice or obligation to purchaser.