
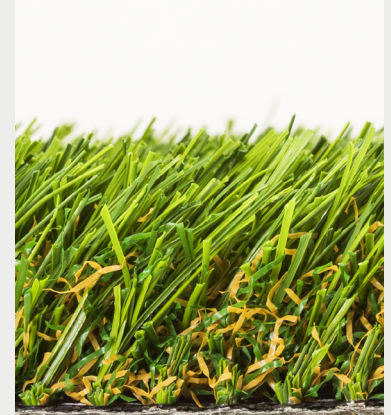


# PL957

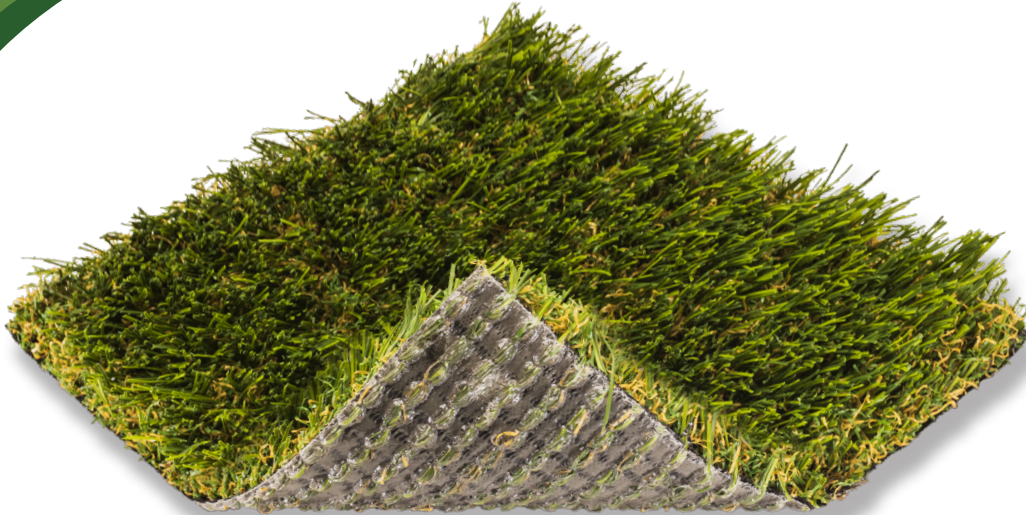

## APPLICATION

This is an excellent landscape product that offers thatch, which provides added body, reducing the amount of infill needed. The four color blend of this surface provides a truly authentic look and feel that resembles a natural lawn. This product can be used for landscapes, pet areas, fringes, and much more. This product can be installed indoors or outdoors on concrete or a compacted aggregate base.

PROPERTY	DESCRIPTION
<b>Primary/Stalk Yarn Type:</b>	Polyethylene
<b>Secondary/Thatch Yarn Type:</b>	Polyethylene
<b>Yarn Cross Section:</b>	Polyethylene Monofilament Ribbed-C with Texturized Polyethylene Thatch
<b>Standard Color(s)*:</b>	Field/Clover or Field/Olive with Field/Jute Thatch
<b>UV Stabilized:</b>	Yes
<b>Fabric Construction:</b>	Tufted
<b>Primary Backing:</b>	ArmorLoc™ 3L Stabilized Woven PP/PET Multilayer
<b>Coating Type(s):</b>	SilverBack™ Polyurethane
<b>Perforations:</b>	Optional
<b>Yarn Denier/Ends:</b>	Stalk: 10800/6 Thatch: 5000/8
<b>Pile Height:</b>	1-5/8"
<b>Face Weight:</b>	60 oz/yd <sup>2</sup>
<b>Fabric Width:</b>	15 ft.



\*Custom colors available upon request

200 Howell Dr. Dalton GA 30721


[www.cpturf.com](http://www.cpturf.com)

800.564.4492




# PL957

FINISHED FABRIC	ENGLISH SYSTEM		METRIC SYSTEM		ASTM TEST F-1551
Nominal Specification	Value	Units	Value	Units	Method
Pile Height (Nominal)	1.625	In.	41.27	mm.	D-5823
Face Weight	60	oz/yd <sup>2</sup>	2,034	g/m <sup>2</sup>	D-5848
Total Fabric Weight	87	oz/yd <sup>2</sup>	2,949	g/m <sup>2</sup>	D-5848
Primary Backing Weight	7	oz/yd <sup>2</sup>	237	g/m <sup>2</sup>	D-5848
Secondary Coating Weight	20	oz/yd <sup>2</sup>	678	g/m <sup>2</sup>	D-5848
Tuft Bind	>10	lbs.	>3.6	Kg.	D-5848
Grab Tear Strength (Average)	>200	lbs.	>91	Kg.	D-5848
Lead Content	<50	ppm	<50	ppm	D-1335
Total Yarn Linear Density	5000	Denier	5,555	D-Tex	D-5034
Tensile Strength	16	lbs.	7.25	Kg.	F-2765
Stitch Rate	9	Per 3"	10.81	Per 10 cm	D-1577
Machine Gauge	3/8"	In.	.9525	Cm.	D-5793
Flammability	TEST	PASSED	TEST	PASSED	D-5793
Water Permeability with Infill, Perforated	>30	In./Hr.	>76	Cm./Hr.	F-1551
Fiber Thickness	–	–	235	microns	F-1551

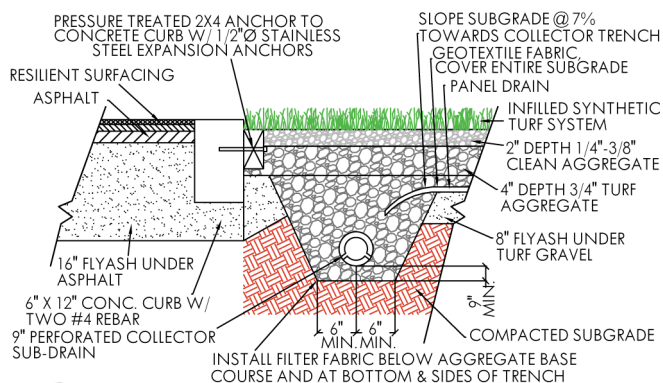

## CURB

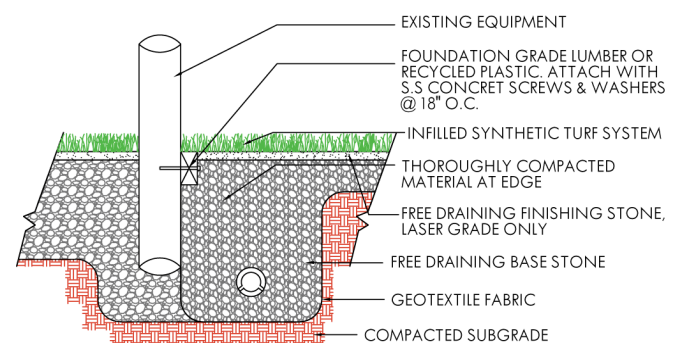

## EQUIPMENT

It is the policy of Controlled Products to continuously improve their line of products. Therefore, Controlled Products reserves the right to change, modify or discontinue systems, specifications and accessories of all products at any time without notice or obligation to purchaser.